


ARC Glassfibre and Rockfibre Faced Rolls

A variety of facings are available on these rolls to act as vapour and fire barriers and also as a deterrent to fibre-migration. Facings are usually placed on the warm side of the building and fixed to studwork or rafters.

Developed for use in thermal and acoustic applications where good tear strength and flanges for fixing purposes are required.

ARC Glassfibre and Rockfibre Faced Rolls are also available for use in lightweight cladding applications to satisfy the thermal, acoustic and fire requirements in roofs and walls. Manufactured to suit the needs of various applications for framed buildings of a commercial or industrial nature, these products have a high tensile strength and are particularly suitable for vertical applications in industrial cladding systems.

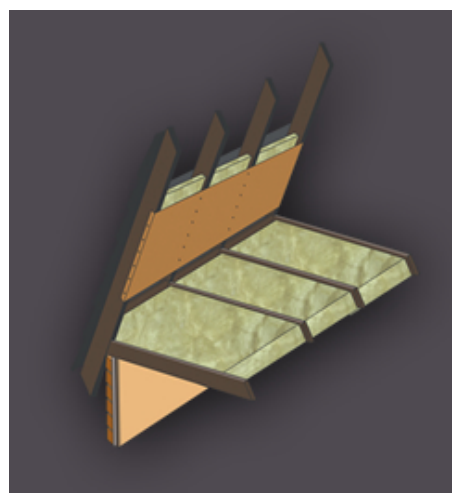

A variety of widths and thicknesses are available.

ARC Glassfibre Rolls	ARC Rockfibre Rolls
A shot-free glassfibre is lightweight, (10kg/m ³) flexible, resilient and non-combustible to BS476: Part 4 1970 (1984), Class 1 Surface Spread of Flame to BS 476: Part 7: 1997 and Class '0' to the building regulations. Ideal for use in framed buildings / cladding systems and roofing applications.	A Rockfibre wool roll conforming to BS EN 13162: 2001 'Specification for factory-made mineral wool products' Achieves a reaction to fire classification of A1 as defined in BS EN 13501 – 1. Density 23 kg/m ³ giving increased acoustic performance.
Thermal conductivity 0.040 w/mk.	Thermal conductivity 0.044 w/mk.
Available in various Thicknesses: 60mm 80mm 100mm 150mm 200mm	Available in various thicknesses: 60mm 80mm 100mm 120mm 150mm 160mm 180mm

ARC Building Solutions Limited

Unit 30a, Headway Business Centre
Knowles Lane
Bradford
West Yorkshire. BD4 9SW

t: 01274 680 577
f: 01274 680 598
e: info@arcbuildingsolutions.co.uk
w: www.arcbuildingsolutions.co.uk